

## Preparing the PEGASO

### Steam Operation:


1. Plug cable into a wall outlet. **NOTE:** Do NOT use multi-outlet power-boards and avoid using low-quality extension cables.

2. Open water tank filler cap (i), fill tank with clean tap water up to the line indicator on the left-side panel (iv) then close filler cap. **NOTE:** Do NOT use de-mineralised water, do NOT fill above maximum line indicator (iv) and do NOT fill with any chemicals.




3. Turn PEGASO on using the ON/OFF switch (a), making sure the "ON" LED (o) lights up and the machine beeps straight away.

4. Press the 'Boiler Switch' button on the display (c) to start the boiler. After approx. 10 minutes the digital display (b) showing the boiler temperature should show a temperature at or slightly above 170°C and the machine should be at pressure (p). This means that the steam function is ready to use.



5. Connect hose into the PEGASO by opening the protective plastic flap located on the front of the machine (v) and pushing the plug end of the hose in with the "doman" imprint on the top side of the hose until it clicks.



Proceed to "Vacuum Operation" and/or "Detergent Operation" section if you are planning on using the vacuum and/or detergent functions together with the steam functions.

### Vacuum Operation:

Locate the vacuum switch (S) on the vacuum head unit (iii) and turn it on.




**NOTE:** The vacuum bucket can be cleaned by detaching the bucket from the vacuum head through the latch that holds it. Always make sure the bucket is fitted on properly to ensure that the contents will not disperse to your surroundings.

### Detergent Operation:

1. Open detergent tank filler cap (ii), fill tank with detergent

2. Remove the detergent tank filler cap and

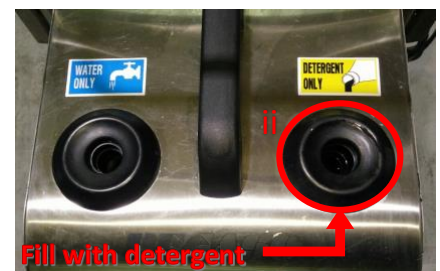

fill with the diluted 101 degreaser solution until it reaches up to the line indicator on the right-side panel (vi). **NOTE:** We recommend using Steam Australia's 101 degreaser or similar to ensure it does not impact machine operation and/or cause adverse health issues.

3. Replace the detergent filler cap (ii) before operating.

## Hose Handle Operations

### Steam Function:

1. After approx. 10 minutes, check that the machine has reached pressure. Ready light will be illuminated and the digital display shows that the boiler temperature reaches at or above 170°C.
2. If the PEGASO makes a beeping noise and the “Tank Level” LED (d) flashes, proceed to Step 2 of “Preparing the PEGASO | Steam Operations” (page 1).
3. For S/V Hose, press and hold the trigger (T) to activate the steam function. For S/O Hose, toggle the steam on/off switch (h) to activate an automatic stream.
4. Adjust the steam level from the knob (e). Turning clockwise will increase steam level, turning counter-clockwise will decrease it.

**WARNING: Do NOT operate hose with steam nozzle pointing at persons, animals or electrical machinery /equipment/outlets/sensors that are sensitive to water and heat (especially near fire alarm sensors).**

### Vacuum Function:

1. Plug the S/V Hose into the PEGASO.
2. Press the vacuum button (f) to engage the vacuum function. The vacuum will turn on and you will feel suction from the vacuum nozzle.

**NOTE:** Ensure that you regularly empty out the contents of the vacuum waste bucket for a smooth operation and change the HEPA filter located under the vacuum head inside of the bucket if it is worn out or too stained.

### Detergent Function:


Press and hold the detergent button (g for S/V Hose, k for S/O Hose) to activate the detergent function.

If the detergent runs low in the PEGASO, the hoses will stop spraying detergent. This is noticeable when using the steam function in conjunction with the detergent function as only the drier steam sprays out the nozzle when the detergent function is activated.

Proceed to Step 1 – 3 of “Preparing the PEGASO | Detergent Operation” (page 1) if this happens.

## Warning Lights

The PEGASO will make a beeping noise and a red LED light will flash when the water tank’s level is low:

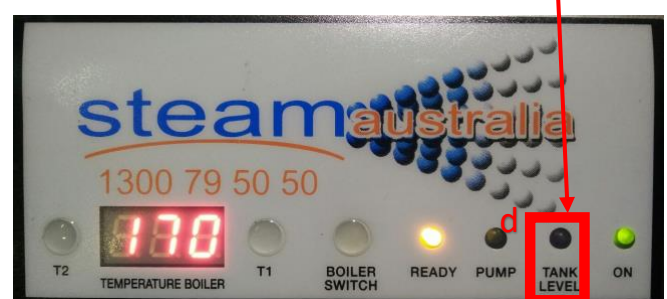

For water tank low level, refer to Step 2 of “Preparing the PEGASO | Steam Operations” (page 1).

## Cleaning the PEGASO

Draining the PEGASO’s boiler once a month ensures that the machine operates at optimal conditions.

**WARNING: Ensure machine has cooled down before attempting to clean out the boiler by checking that the machine doesn’t feel warm on the bottom part and machine is free from any pressure.**

*You will need:*



- A pan or container that can hold at least 5 litres of water
- A rag
- Flathead screwdriver
- Supplied socket wrench

1. Ensure the machine isn’t plugged into a power source and the machine doesn’t feel warm (no pressure present).
2. Locate the brass boiler plug underneath the PEGASO and position the PEGASO on top of a pan or container.
3. Using the supplied socket wrench, unscrew the boiler plug by slowly turning counter-clockwise. You may need to use a rag to hold the plug as you unscrew the plug by hand after loosening using the socket wrench. Let the water drain, then screw the plug back on and tighten with supplied socket wrench.

## Floor Tool S/V












		<p>KIT0804 Floor Brush 300mm</p>	<p>For hard floor surfaces such as:</p> <ul style="list-style-type: none"> <li>- Tiles</li> <li>- Marble</li> <li>- Most sealed hardwood</li> <li>- Linoleum &amp; Vinyl</li> <li>- Carpets</li> <li>- Non-slip surfaces</li> </ul>
		<p>KIT0822 Teflon Carpet Insert</p>	<p>First, use high steam pressure to lift dirt off the floor. Then disengage the steam and turn on the vacuum to suck the floor dry.</p>
		<p>KIT0824 Rubber Lip Insert</p>	<p>We recommend using the steam and vacuum functions separately as it will perform better this way.</p>
		<p>2 x KIT0801 Extension Tube S/V 500mm</p>	<p>Whenever the vacuum motor is turned on, the steam boiler loses some of its power and will take longer to produce</p>
		<p>KIT0800/MOD S/V Hose 4M</p>	

## Squeegee S/V




		<p>KIT0805 Steam/Vac Squeegee 300mm</p>	<p>Spray a stream of steam in a circular motion onto the glass surface, then use the rubber squeegee part to remove water condensation and clean the surface.</p>
			<p>If using in areas with frosty climates, warm the windows or mirrors by spraying a high stream of steam for a slightly prolonged time before cleaning.</p>
			<p>This tool is also available for the <b>KIT0800/MOD</b> Steam + Vacuum Hose:</p>
			<p><b>KIT0805</b> S/V Squeegee 300mm</p>









## Detailing Extension + Small Nylon Brush (Steam Only)

		<p>KIT0703 Steam Lance 100mm</p>	<p>For detail cleaning in kitchens, bathrooms and other areas:</p>
		<p>2 x KIT0701 S/O Extension Tube 500mm</p>	<ul style="list-style-type: none"> <li>- Tile grouts (walls and floors)</li> <li>- Drains</li> <li>- Cooktops</li> <li>- Bathtubs</li> <li>- Roadside chewing gum removal</li> </ul>
		<p>KIT0700 S/O Hose 4M</p>	<p>For best results, hold brush on angle to clean sides of the grout line, and then tilt in other direction to clean the other side of the grout line.</p>
		<p>KIT0816/N Small Brush w/ nylon bristles</p>	<p>Optional stainless steel and/or brass brushes can be fitted onto the detailing nozzle to scrub off certain hard-to-remove stains in nooks and crannies. Stainless steel is particularly effective on grout and chewing gum stains.</p>
		<p>KIT0816/I Small Brush w/ Stainless Steel bristles</p>	<p>Be wary that the stainless steel and brass brushes may scratch certain surfaces, leaving unwanted scratch marks. Always test areas in an inconspicuous spot before proceeding.</p>
	<p><i>Optional Accessories:</i></p>		
		<p>KIT0816/O Small Brush w/ Brass bristles</p>	<p>This tool is also available for the <b>KIT0800/MOD</b> Steam + Vacuum hose:</p>
		<p>KIT0814/O Big Round Brush w/ Brass bristles</p>	<p><b>KIT0808/DA/X</b> – S/V lance short <b>KIT0801</b> – Extension Tube S/V 500mm</p>
			<p>The brushes fits both S/V and S/O lances.</p>







## Car Wash Upholstery Tool (Steam + Vacuum)

	 <p>KIT0806/CW Car Wash Upholstery Tool</p>  <p>KIT0800/CW6M S/V Hose Car Wash 6M (short grip)</p>	<p>The optional <b>KIT0800/CW6M</b> Hose features a shorter handle grip that gives an easier access for use in car detailing jobs. When used in conjunction with the <b>KIT0806/CW</b> upholstery tool, it is the best tool combination for cleaning interior carpets, mats, roof linings and fabric car seats.</p> <p>Turn on the vacuum. Squeeze the steam trigger and vacuum at the same time by dragging the tool towards you in a straight line. Let go of the steam trigger when you are finished with one line and repeat the previous step by starting on a new straight line. Best used with the detergent function.</p>
---	--	---







## Triangular Brush (Steam Only)

	 <p>KIT0709 Triangular Brush with bristles</p>  <p>KIT0706 Joint for brushes</p>  <p>2 x KIT0701 S/O Extension Tube 500mm</p>  <p>KIT0700 S/O Hose 4M</p>  <p>Microfibre Cloth</p>	<p>For cleaning skirting boards, kitchen benchtops, underneath kitchen cabinets, rangehoods, car interior mattresses, upholstery and other areas.</p> <p>Begin with low level steam to loosen bacteria, introduce light to moderate scrubbing as required, with or without steam activated.</p> <p>To steam clean upholstery and other surfaces, fit brush with cushion and wrap with a reusable or disposable microfibre cloth securing with clips on tool. This creates a superheated steam pocket with a smooth surface to effectively sanitise a range or hard and soft surfaces.</p> <p><b>Caution:</b> when cushion &amp; microfibre are used tool will retain heat and moisture. This tool must be used with caution with risk of burning. Tools will be hot after use.</p>
---	---	--

## Floor Brush (Steam Only)

	 <p>KIT0707 Rectangle Floor S/O Brush</p>  <p>KIT0706 Joint for brushes</p>  <p>2 x KIT0701 S/O Extension Tube 500mm</p>  <p>KIT0700 S/O Hose 4M</p>  <p>Microfibre Cloth</p>	<p>For cleaning walls &amp; floors where abrasion is required. Including tiles &amp; grout, marble, sealed concrete, linoleum &amp; vinyl &amp; non slip surfaces. Sanitising soft surfaces such as carpet, mattresses &amp; upholstery.</p> <p>Begin with low level steam to loosen bacteria, introduce light to moderate scrubbing as required, with or without steam activated.</p> <p>Wrap the rectangle brush with microfibre cloth to steam clean upholstery and other surfaces such as mattresses and lounges. This creates a super heated steam pocket as the microfibre wrap retains the heat. This is excellent for sanitising surfaces and killing bacteria, dust mites &amp; bed bugs.</p> <p><b>Caution:</b> when cushion and microfibre are used tool will retain heat and moisture. This combined tool must be used with caution with risk of burning. Tools will be hot after use.</p>
--	--	--

## Floor Mop Head + Microfibre Mop Pad (Steam Only) (Optional Extras)

	 <p>KIT0714 Steam Mop 400mm</p>  <p>KITQ706 Microfibre Mop Pad 400mm</p>  <p>2 x KIT0701 S/O Extension Tube 500mm</p>  <p>KIT0706 Joint for brushes</p>  <p>KIT0700 S/O Hose 4M</p>	<p>For cleaning non-carpeted hard-floor surfaces.</p> <p>Engage steam flow and move forwards and backwards quickly over the floor surface.</p> <p><b>Caution:</b> when cushion and microfibre are used tool will retain heat and moisture. This combined tool must be used with caution with risk of burning. Tools will be hot after use.</p>
---	--	--